

☐ Surgical Power tools
Drilling, Reaming and Saw System





Cannulation

Specifications :	
Power Output :	≥ 85W
Speed :	0-630(r.p.m)
Torque :	3.6Nm
Noise :	≤ 40 (db)
Battery :	9.6 (V), Ni-Mh, 1800 mA/h
Sterilization :	135° C

SPT1417 BATTERY OPERATED CANNULATED REAMING & DRILLING SYSTEM

Set Consisting of:

	Units
SPT1417.1 Battery powered handpiece with AO/Synthes Reamer Adapter	1
SPT141 Battery	2
SPT142 Battery Charger 220V, 50Hz	1
SPT143 Sterilizing Ring	2
SPT144 Jacob Chuck & Key	1

OPTIONAL Adapters for SPT1417 (To be Ordered Separately at Extra Cost)

SPT08 Hudson Adapter
SPT09 Zimmer Adapter
SPT10 Link Adapter
SPT11 Aesculap Adapter
SPT12 Stryker Adapter

SPT1418 BATTERY OPERATED CANNULATED REAMING & DRILLING SYSTEM

Same as SPT1417 but with Stryker Reamer Adapter

OPTIONAL Adapters for SPT1418 (To be Ordered Separately at Extra Cost)

SPT13 Link Adapter
SPT14 Aesculap Adapter
SPT15 AO/Synthes Adapter

Usage: Trauma Operation. Dual function, stepless variable speed control



Specifications :	
Power Output :	≥ 80W
Oscillation :	0-15000(osc/min)
Noise :	≤ 75 (db)
Battery :	9.6 (V), Ni-Mh, 1800 mA/h
Sterilization :	135° C

SPT1427 BATTERY OPERATED OSCILLATING SAW SYSTEM

Set Consisting of:

	Units
SPT1427.1 Battery powered handpiece	1
SPT141 Battery	2
SPT142 Battery Charger 220V, 50Hz	1
SPT143 Sterilizing Ring	2

Set of 3 Blades as below

1 Set

Code	Cutting Thickness mm	Usable Length mm	Width mm	Qty
SPT27.20	0.80	70	22	1
SPT27.38	1.00	90	22	1
SPT27.35	1.00	90	14	1

(For spare blades refer end of the chapter)

Usage: Joint Operation. Powerful, Stepless Variable Speed Control

Specifications :	
Power Output :	$\geq 95W$
Speed :	0-1100 (r.p.m)
Torque :	2.5Nm
Noise :	≤ 40 (db)
Battery :	9.6 (V), Ni-Mh, 1800 mA/h
Sterilization :	135° C

SPT1457 BATTERY OPERATED DRILLING SYSTEM

Set Consisting of:

		Units
SPT1457.1	Battery powered handpiece with Jacob Chuck & Key	1
SPT141	Battery	2
SPT142	Battery Charger 220V, 50Hz	1
SPT143	Sterilizing Ring	2

Usage: Trauma Operation. Powerful, stepless variable speed control



Specifications :	
Power Output :	$\geq 65W$
Speed :	0-280(r.p.m)
Torque :	5.5Nm
Noise :	≤ 40 (db)
Battery :	9.6 (V), Ni-Mh, 1800 mA/h
Sterilization :	135° C

SPT1437 BATTERY OPERATED ACETABULAR REAMING SYSTEM

Set Consisting of:

		Units
SPT1437.1	Battery powered handpiece with AO/Synthes Reamer Adapter	1
SPT141	Battery	2
SPT142	Battery Charger 220V, 50Hz	1
SPT143	Sterilizing Ring	2
SPT144	Jacob Chuck & Key	1

Usage: Joint Operation. High torque, Low speed, stepless variable speed control



SPT1438 BATTERY OPERATED ACETABULAR REAMING SYSTEM

Same as SPT1437 but with Stryker Reamer Adapter

To be Ordered Separately at Extra Cost

SPT37.2	Acetabulum Reamer Shaft (AO/Synthes Type)
SPT38.2	Acetabulum Reamer Shaft (Stryker Type)

Acetabulum Reamer (AO/Synthes Type): SPT37.036 to SPT37.064

Acetabulum Reamer (Stryker Type): SPT38.036 to SPT38.064

(Please Ref. Page No.: 473 for full details)




OPTIONAL Adapters for SPT1437
(To be Ordered Separately at Extra Cost)

SPT08	Hudson Adapter
SPT09	Zimmer Adapter
SPT10	Link Adapter
SPT11	Aesculap Adapter
SPT12	Stryker Adapter

OPTIONAL Adapters for SPT1438
(To be Ordered Separately at Extra Cost)

SPT13	Link Adapter
SPT14	Aesculap Adapter
SPT15	AO/Synthes Adapter

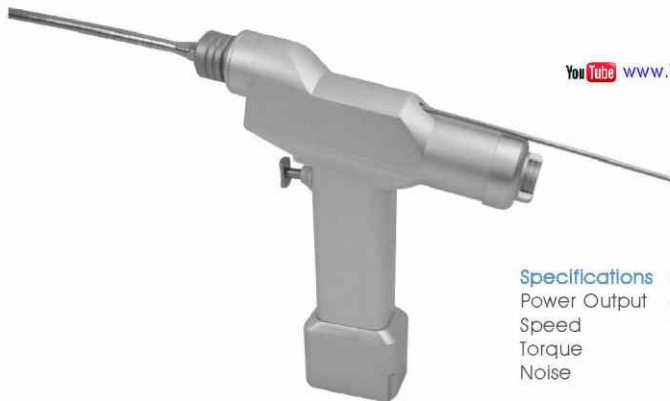

YouTube www.TV.ortho.in/27899

Specifications :	
Power Output :	≥ 90W
Speed :	0-630 (r.p.m)
Torque :	4.6 Nm
Noise :	≤ 40 (db)
Battery :	14.4 (V), Ni-Mh, 1800 mA/h
Sterilization :	155° C



Cannulation

SPT17 BATTERY OPERATED CANNULATED REAMING & DRILLING SYSTEM

Set Consisting of:

Units

SPT17.1	Battery powered handpiece with AO/Synthes Reamer Adapter	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2
SPT04	Jacob Chuck & Key	1

OPTIONAL Adapters for SPT17

(To be Ordered Separately at Extra Cost)

SPT08	Hudson Adapter
SPT09	Zimmer Adapter
SPT10	Link Adapter
SPT11	Aesculap Adapter
SPT12	Stryker Adapter

SPT18 BATTERY OPERATED CANNULATED REAMING & DRILLING SYSTEM

Same as SPT17 but with Stryker Reamer Adapter

OPTIONAL Adapters for SPT18

(To be Ordered Separately at Extra Cost)

SPT13	Link Adapter
SPT14	Aesculap Adapter
SPT15	AO/Synthes Adapter

Usage: Trauma Operation. Dual function, stepless variable speed control



YouTube www.TV.ortho.in/79

Specifications :	
Power Output :	≥ 100W
Oscillations :	0-16000(osc/min)
Noise :	≤ 75 (db)

Battery :	14.4 (V), Ni-Mh, 1800 mA/h
------------------	-------------------------------

Sterilization :	155° C
------------------------	--------

SPT27 BATTERY OPERATED OSCILLATING SAW SYSTEM

Set Consisting of:

Units

SPT27.1	Battery powered handpiece	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2

Set of 3 Blades as below

1 Set

Code	Cutting Thickness mm	Usable Length mm	Width mm	Qty
SPT27.20	0.80	70	22	1
SPT27.38	1.00	90	22	1
SPT27.35	1.00	90	14	1

(For spare blades refer end of the chapter)

Usage: Joint Operation. Powerful, Stepless Variable Speed Control

Specifications :
 Power Output : $\geq 95W$
 Oscillations : 0-16000(osc/min)
 Voltage : 12(V)
 Noise : ≤ 70 (db)

Battery : 14.4 (V), Ni-Mh,
1800 mA/h
 Sterilization : 155° C



SPT30 BATTERY OPERATED STERNUM SAW SYSTEM

Set Consisting of:		Units
SPT30.1	Battery powered handpiece	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2
SPT06.30	Protection Sleeve	1

With One Blade as per details below :

Code	Cutting Thickness mm	Usable Length mm	Width mm	Qty
SPT30.20	0.80	35	7	1

Usage: For Thoracic Operation. Powerful, Stepless Variable Speed Control

Specifications :
 Power Output : $\geq 85W$
 Speed : 0-320(r.p.m)
 Torque : 7.8 Nm
 Noise : ≤ 40 (db)

Battery : 14.4 (V), Ni-Mh, 1800 mA/h
 Sterilization : 155° C



SPT37 BATTERY OPERATED ACETABULAR REAMING SYSTEM

Set Consisting of:		Units
SPT37.1	Battery powered handpiece with AO/Synthes Reamer Adapter	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2
SPT04	Jacob Chuck & Key	1

Usage: Joint Operation. High torque, Low speed, Stepless variable speed control

SPT38 BATTERY OPERATED ACETABULAR REAMING SYSTEM

Same as SPT37 but with Stryker Reamer Adapter

SPT37.2	To be Ordered Separately at Extra Cost Acetabulum Reamer Shaft (AO/Synthes Type)
SPT38.2	Acetabulum Reamer Shaft (Stryker Type)

Acetabulum Reamer (AO/Synthes Type): SPT37.036 to SPT37.064
 Acetabulum Reamer (Stryker Type): SPT38.036 to SPT38.064
 (Please Ref. Page No.: 473 for full details)



OPTIONAL Adapters for SPT37
 (To be Ordered Separately at Extra Cost)

SPT08	Hudson Adapter
SPT09	Zimmer Adapter
SPT10	Link Adapter
SPT11	Aesculap Adapter
SPT12	Stryker Adapter

OPTIONAL Adapters for SPT38
 (To be Ordered Separately at Extra Cost)

SPT13	Link Adapter
SPT14	Aesculap Adapter
SPT15	AO/Synthes Adapter



Usage: For Thoracic Operation. Powerful, Stepless Variable Speed Control

Specifications :
 Power Output : $\geq 95W$
 Oscillations : 0-16000(osc/min)
 Noise : ≤ 75 (db)
Battery : 14.4 (V), Ni-Mh, 1800 mA/h
Sterilization : 155° C

SPT40 BATTERY OPERATED OVERHAUL SAW SYSTEM

Set Consisting of:		Units
SPT40.1	Battery powered handpiece	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2

With One Fan Shaped Blade as per details below :

Code	Cutting Thickness mm	Usable Length mm	Dia. mm	Qty
SPT40.20	0.80	32	60	1



Usage: Trauma Operation. Powerful, Stepless variable speed control

Specifications :
 Power Output : $\geq 110W$
 Speed : 0-1100 (r.p.m)
 Torque : 3.2Nm
 Noise : ≤ 40 (db)
Battery : 14.4 (V), Ni-Mh, 1800 mA/h
Sterilization : 155° C

SPT57 BATTERY OPERATED DRILLING SYSTEM

Set Consisting of:		Units
SPT57.1	Battery powered handpiece with jacub Chuck & Key	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2



Usage: For Cranial operation, stops by itself after Drill, Powerful, Stepless Variable Speed Control

Specifications :
 Power Output : $\geq 110W$
 Speed : 0-1100(r.p.m)
 Torque : 3.3Nm
 Noise : ≤ 40 (db)
Battery : 14.4 (V), Ni-Mh, 1800 mA/h
Sterilization : 155° C

SPT77 BATTERY OPERATED CRANIAL DRILLING SYSTEM

Set Consisting of:		Units
SPT77.1	Battery powered handpiece	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2
SPT05	Cranial Head	1

Specifications :
 Power Output : $\geq 90W$
 Speed : 0-40000(r.p.m)
 Noise : ≤ 40 (db)

Battery : 14.4 (V), Ni-Mh,
1800 mA/h

Sterilization : 155° C



SPT97 BATTERY OPERATED CRANIAL BUR

Set Consisting of: Units

SPT97.1	Battery powered handpiece	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2
SPT06.97	Protection Sleeve	1
SPT07	Milling Bur 3 mm dia	1

Usage: For Cranial Operation, Powerful, Stepless Variable Speed Control

Specifications :
 Power Output : $\geq 95W$
 Oscillations : 0-16000(osc/min)
 Noise : ≤ 70 (db)

Battery : 14.4 (V), Ni-Mh,
1800 mA/h

Sterilization : 155° C



SPT50 BATTERY OPERATED RECIPROCATING SAW SYSTEM

Set Consisting of: Units

SPT50.1	Battery powered handpiece	1
SPT01	Battery	2
SPT02	Battery Charger 220V, 50Hz	1
SPT03	Sterilizing Ring	2

With One Reciprocating Saw Blade as per details below :

Code	Cutting Thickness	Usable Length	Width	Qty
SPT50.20	1.00 mm	70 mm	13 mm	1

Usage: For Surgery Operation. Powerful, Stepless Variable Speed Control

SPARE RECIPROCATING SAW BLADES

Code	Cutting Thickness	Usable Length mm	Width mm
SPT50.22	0.50	20	4
SPT50.24	0.80	28	4
SPT50.26	0.80	35	7

Specifications :	
Power Output	: $\geq 100W$
Speed	: 0-630 (r.p.m)
Torque	: 5.1Nm
Noise	: ≤ 40 (db)
Battery :	
14.4 (V), Ni-Mh, 1800 mA/h	
Sterilization :	
135° C	



SPT617 BATTERY OPERATED CANNULATED REAMING & DRILLING SYSTEM HIGH TORQUE / HIGH POWER

Set Consisting of:		Units
SPT617.1	Battery powered handpiece with AO/Synthes Reamer Adapter	1
SPT61	Battery	2
SPT62	Battery Charger 220V, 50Hz	1
SPT63	Sterilizing Ring	2
SPT64	Jacob Chuck & Key	1

OPTIONAL Adapter for SPT617 (To be Ordered Separately at Extra Cost)

SPT08	Hudson Adapter
SPT09	Zimmer Adapter
SPT10	Link Adapter
SPT11	Aesculap Adapter
SPT12	Stryker Adapter

SPT618 BATTERY OPERATED CANNULATED REAMING & DRILLING SYSTEM HIGH TORQUE / HIGH POWER

Same as SPT617 but with Stryker Reamer Adapter

OPTIONAL Adapters for SPT618 (To be Ordered Separately at Extra Cost)

SPT13	Link Adapter
SPT14	Aesculap Adapter
SPT15	AO/Synthes Adapter

Usage: Trauma Operation, Dual Function, Stepless variable speed control

Specifications :	
Power Output	: $\geq 110W$
Oscillations	: 0-16000 (osc/min)
Noise	: ≤ 75 (db)

Battery :	
14.4 (V), Ni-Mh, 1800 mA/h	

Sterilization :	
135° C	

SPT627 BATTERY OPERATED OSCILLATING SAW SYSTEM, HIGH TORQUE / HIGH POWER

Set Consisting of:		Units
SPT627.1	Battery powered handpiece	1
SPT61	Battery	2
SPT62	Battery Charger 220V, 50Hz	1
SPT63	Sterilizing Ring	2

Set of 3 Blades as below : 1 Set

Code	Cutting Thickness mm	Usable Length mm	Width mm	Qty
SPT27.22	0.8	70	24	1
SPT27.38	1.0	90	22	1
SPT27.35	1.0	90	14	1

(For spare blades refer end of the chapter)



Usage: Joint Operation, Powerful, Stepless Variable Speed Control

Specifications :	
Output Power :	≥ 95W
Speed :	0-350 (r.p.m)
Torque :	9.0Nm
Noise :	≤ 40 (db)
Battery :	14.4 (V), Ni-Mh, 1800 mA/h
Sterilization :	135° C

SPT637 BATTERY OPERATED ACETABULAR REAMING SYSTEM, HIGH TORQUE / HIGH POWER

Set Consisting of:		Units
SPT637.1	Battery powered handpiece with AO/Synthes Reamer Adapter	1
SPT61	Battery	2
SPT62	Battery Charger 220V, 50Hz	1
SPT63	Sterilizing Ring	2
SPT64	Jacob Chuck & Key	1



Usage: Joint Operation. High torque, Low speed, stepless variable speed control

SPT638 BATTERY OPERATED ACETABULAR REAMING SYSTEM, HIGH TORQUE / HIGH POWER

Same as SPT637 but with Stryker Reamer Adapter

□ SPARES FOR ACETABULUM REAMING SYSTEM

(To be Ordered Separately at Extra Cost)

SPT37.2	Acetabulum Reamer Shaft (AO/Synthes Type) for SPT37, SPT637 & SPT1437.
SPT38.2	Acetabulum Reamer Shaft (Stryker Type) for SPT38, SPT638 & SPT1438.



Acetabulum Reamer (AO/Synthes Type): SPT37.036 to SPT37.064

Code No.	Size	Code No.	Size	Code No.	Size
SPT37.036	36mm	SPT37.046	46mm	SPT37.056	56mm
SPT37.038	38mm	SPT37.048	48mm	SPT37.058	58mm
SPT37.040	40mm	SPT37.050	50mm	SPT37.060	60mm
SPT37.042	42mm	SPT37.052	52mm	SPT37.062	62mm
SPT37.044	44mm	SPT37.054	54mm	SPT37.064	64mm

Acetabulum Reamer (Stryker Type): SPT38.036 to SPT38.064

Code No.	Size	Code No.	Size	Code No.	Size
SPT38.036	36mm	SPT38.046	46mm	SPT38.056	56mm
SPT38.038	38mm	SPT38.048	48mm	SPT38.058	58mm
SPT38.040	40mm	SPT38.050	50mm	SPT38.060	60mm
SPT38.042	42mm	SPT38.052	52mm	SPT38.062	62mm
SPT38.044	44mm	SPT38.054	54mm	SPT38.064	64mm

OPTIONAL Adapters for SPT37, SPT637 & SPT1437 (To be Ordered Separately at Extra Cost)

SPT08	Hudson Adapter
SPT09	Zimmer Adapter
SPT10	Link Adapter
SPT11	Aesculap Adapter
SPT12	Stryker Adapter

OPTIONAL Adapters for SPT38, SPT638 & SPT1438 (To be Ordered Separately at Extra Cost)

SPT13	Link Adapter
SPT14	Aesculap Adapter
SPT15	AO/Synthes Adapter



Cannulation

Usage: For Small bone Trauma Operation,
Stepless variable speed control

Specifications :

Power Output : $\geq 20W$
Speed : 0-460 (r.p.m)
Torque : 1.0 Nm
Noise : ≤ 40 (db)

Battery : 7.2 (V), Ni-Mh,
1800 mA/h

Sterilization : 155° C

SPT817 BATTERY OPERATED CANNULATED DRILLING SYSTEM, FOR SMALL BONE

Set Consisting of:

		Units
SPT817.1	Battery powered handpiece	1
SPT81	Battery	2
SPT82	Battery Charger 220V, 50Hz	1
SPT83	Sterilizing Ring	2
SPT84	Jacob Chuck & Key	1



Usage: Joint Operation. Powerful,
Stepless Variable Speed Control

Specifications :

Power Output : $\geq 40W$
Oscillations : 0-15000(osc/min)
Noise : ≤ 50 (db)

Battery : 7.2 (V), Ni-Mh,
1800 mA/h

Sterilization : 135° C

SPT827 BATTERY OPERATED OSCILLATING SAW SYSTEM, FOR SMALL BONE

Set Consisting of:

		Units
SPT827.1	Battery powered handpiece	1
SPT81	Battery	2
SPT82	Battery Charger 220V, 50Hz	1
SPT83	Sterilizing Ring	2

With One Blade as per details below :

Code	Cutting Thickness mm	Usable Length mm	Width mm	Qty
SPT827.20	0.8	50	16	1

(For spare blades refer end of the chapter)



Usage: For Small bone Trauma Operation,
Powerful, Stepless variable speed control

Specifications :

Power Drill : $\geq 30W$
Speed : 0-950 (r.p.m)
Torque : 0.9Nm
Noise : ≤ 40 (db)

Battery : 7.2 (V), Ni-Mh,
1800 mA/h

Sterilization : 135° C

SPT857 BATTERY OPERATED DRILLING SYSTEM, FOR SMALL BONE

Set Consisting of:

		Units
SPT857.1	Battery powered handpiece	1
SPT81	Battery	2
SPT82	Battery Charger 220V, 50Hz	1
SPT83	Sterilizing Ring	2

Specifications :
Battery : 9.6 (V), Ni-Mh, 1600 mA/h
Sterilization : 135° C

SPT2100 BATTERY OPERATED MULTIFUNCTIONAL SYSTEM

Multifunctional Battery Powered Handpiece

Specifications:

Handpiece can drive a variety of quick attachments.
Attachments can be assembled and disassembled easily. 360° rotating.
The main components are made of high strength stainless steel. 135°C Autoclavable.

Set Consisting of:

		Units
SPT2100.1	Battery powered multifunctional handpiece	1
SPT211	Battery	2
SPT212	Battery Charger 220V, 50Hz	1
SPT213	Sterilizing Ring	2
SPT214	Jacob Chuck & Key	1



ATTACHMENTS FOR SPT2100

(To be Ordered Separately at Extra Cost)

SPT2101

Sagittal Saw Attachment

360° Rotating
For Joint Operation

Set of 3 Blades as below

Code	Cutting Thickness mm	Usable Length mm	Width mm	Qty
SPT27.20	0.80	70	22	1
SPT27.38	1.00	90	22	1
SPT27.35	1.00	90	14	1

(For spare blades refer end of the chapter)



Code No.: SPT2101

SPT2102

Bone Drill Attachment

For Trauma Operation



Code No.: SPT2102

SPT2103

Canulate Drill Attachment

Quick chuck: Maximum for diameter of 8.00mm
for ward/reverse control.
For Trauma Operation



Code No.: SPT2103

SPT2104

Cranial Drill Attachment

Can be stopped by itself after drill through.
For Cranial Operation.



Code No.: SPT2104

SPT2105

Cranial Bur Attachment

0-6000RPM Rates.
For Cranial Operation.



Code No.: SPT2105

SPT2106

Sternum Saw Attachment

360° Rotating.
For Thoracic Operation



Code No.: SPT2106

SPT2107

Acetabulum Reaming Drill Attachment (AO Type)

For Joint Operation



Code No.: SPT2107



Code No.: SPT2108

SPT2108

Acetabulum Reaming Drill Attachment (Stryker Type)
For Joint Operation

Spares for SPT2107 & SPT2108

(to be Ordered Separately at Extra Cost)

Acetabulum Reamer Shaft

Acetabulum Reamer, Size 36mm to 64mm



Code No.: SPT2109

SPT2109

Reciprocating Saw Attachment

For Surgery Operation



Code Nos.: SPT2110 & SPT2111

SPT2110

Torque Limiter Attachment (1.5NM)

For Trauma Operation

SPT2111

Torque Limiter Attachment (4NM)

For Trauma Operation



Code No.: SPT2112

SPT2112

TPLO Attachment



SPARE OSCILLATING SAW BLADES FOR SPT27, SPT627 & SPT1427

Code	Cutting Thickness	Usable Length mm	Width mm
SPT27.20	0.80	70	22
SPT27.22	0.80	70	24
SPT27.35	1.00	90	14
SPT27.38	1.00	90	22
SPT27.44	1.20	70	22
SPT27.47	1.20	90	14
SPT27.56	1.27	70	22
SPT27.59	1.27	90	14

SPARE OSCILLATING SAW BLADES FOR SMALL BONES - SPT827

Code	Cutting Thickness	Usable Length mm	Width mm
SPT827.22	0.50	25	9.5
SPT827.24	0.50	35	7.5
SPT827.26	0.50	41	14

SPARE SAW BLADES (AS PER SPECIFIC REQUIREMENT)

Length mm	Width mm	Height mm
35	9.5	0.5
37	8	0.8
41/45	9.5/10/14	0.5/1.0
50/55/60	10/13.5/16/20	0.5/0.8/1.0
70/80	13/14/20/21/22/23/24/34	0.8/1.0/1.2/1.27
90	13/14/18/19/22/24/25	0.8/1.0/1.2/1.27
100	24/25	1.2/1.27
110	24	1.2/1.27
115	18/22	1.2/1.27

□ SURGICAL POWER TOOLS - SPARES



Spare Battery
Code No.: SPT01



Sterilizing Ring
Code No.: SPT03



Battery Charger 220V, 50Hz
Code No.: SPT02



Jacob Chuck & Key
Code No.: SPT04



Hudson Adapter
Code No.: SPT08



Zimmer Adapter
Code No.: SPT09

YouTube www.TV.ortho.in/7193

DRILL & SAW SYSTEM (Electrically Operated - 220V, 50 Hz)

Code No.	Description
ODS01	Driving Unit includes Motor Stand, Foot Control, Flexible Shaft, Tool Kit, Oil Bottle & Special Container.
Specifications:	
- NET Driving Unit is having a Motor 220V / 5 amp AC with Mobile Stand made up of Stainless Steel tubes with castors.	
- NET Driving Unit includes Motor, Stand, Foot Control, Flexible Shaft.	
- Requires to run all NET power tools.	
- NET Flexible Shaft is Autoclavable.	
- It can withstand to superheated steam temperatures.	
ODS03	Cannulated Drilling Handpiece (1200 RPM)
ODS07	Sagittal Saw Handpiece (With Set of 5 Blades)
ODS11	Reaming Handpiece Cannulated, Quick Coupling
Optional Instruments: (To be Ordered Separately)	
ODS52	Transverse Saw (with Set of 5 Blades)



Driving Unit
Code No.: ODS01



Cannulated Drilling Handpiece
(1200 RPM)
Code No.: ODS03



Sagittal Saw Handpiece
(With Set of 5 Blades)
Code No.: ODS07



Reaming Handpiece Cannulated
Quick Coupling
Code No.: ODS11



Transverse Saw
(with Set of 5 Blades)
Code No.: ODS52

□ DRILL ACCESSORIES - OPTIONAL

(To be Ordered Separately)

Code S.S.	Description	Code Titanium Nitrate
507.038	Flexible Reaming Shaft with Fixed Reamer, Dia. 8mm	TN-507.038
507.03	Flexible Reamer Shaft only (For Reamer Head upto 13mm.).	TN-507.03
507.23	Flexible Reamer Shaft only (For Reamer Head from 13.5mm to 15mm.).	TN-507.23
510.7	Medullary Reamer, Size: 7mm	TN-510.7
510.8	Medullary Reamer, Size: 8mm	TN-510.8
510.85	Medullary Reamer, Size: 8.5mm	TN-510.85
510.9	Medullary Reamer, Size: 9mm	TN-510.9
510.95	Medullary Reamer, Size: 9.5mm	TN-510.95
510.10	Medullary Reamer, Size: 10mm	TN-510.10
510.105	Medullary Reamer, Size: 10.5mm	TN-510.105
510.11	Medullary Reamer, Size: 11mm	TN-510.11
510.115	Medullary Reamer, Size: 11.5mm	TN-510.115
510.12	Medullary Reamer, Size: 12mm	TN-510.12
510.125	Medullary Reamer, Size: 12.5mm	TN-510.125
510.13	Medullary Reamer, Size: 13mm	TN-510.13
510.135	Medullary Reamer, Size: 13.5mm	TN-510.135
510.14	Medullary Reamer, Size: 14mm	TN-510.14
510.145	Medullary Reamer, Size: 14.5mm	TN-510.145
510.15	Medullary Reamer, Size: 15mm	TN-510.15
ODS41	Synthes Adpater, Stainless Steel.	
ODS43	Trinkle Fit Adapter, Stainless Steel	
ODS45	Hudson Adapter, Stainless Steel	
ODS47	Drill Chuck Adapter, Stainless Steel	
ODS49	Flexible Shaft for Driving Unit (Extra)	
ODS51	Spare Set of Blades	
ODS60	Spare Oil Bottle, 30 ml.	



Synthes Adpater
Code No.: ODS41



Trinkle Fit Adapter
Code No.: ODS43



Hudson Adapter
Code No.: ODS45



Drill Chuck Adapter
Code No.: ODS47



Flexible Shaft for Driving Unit (Extra)
Code No.: ODS49



Spare Set of Blades
Code No.: ODS51



Spare Oil Bottle, 30 ml.
Code No.: ODS60



Flexible Reaming Shaft with Fixed Reamer, Dia. 8.0mm.
Code No.: 507.038
Code No. Titanium Nitrate: TN-507.038



Medullary Reamer
(Size: 7 to 15mm with 0.5mm difference)
Code No. S.S.: 510.7 to 510.15
Code No. Titanium Nitrate: TN-510.7 to TN-510.15

Flexible Reaming Shaft
Code No. S.S.: 507.03 (for Reamer Head 9 to 13mm)
Code No. Titanium Nitrate: TN-507.03 (for Reamer Head 9 to 13mm)
Code No. S.S.: 507.23 (for Reamer Head 13.5 to 15mm)
Code No. Titanium Nitrate: TN-507.23 (for Reamer Head 13.5 to 15mm)



Electric Bone Drill (220V 50Hz AC)
Code No.: 399.010M



**Universal Bone Drill
with S.S. Closed Gears**
Code No.: 320.010
www.TV.ortho.in/14817



**Universal Open Hand Drill
with S.S. Gears**
Code No.: 320.030



**Micro Hand Drill
with S.S. Closed Gears**
Code No.: 320.020



Mini Hand Drill
Code No.: 311.033
www.TV.ortho.in/16493



Micro Open Hand Drill
Code No.: 320.040